

## VWBG-KA-28; 31,5t M72 with variable length


Artikel-Nr: 8600239



Lifting point with a ball bearing for the direct connection of the VIP chain. Version VWBG-KA. Thread reach from  $F = 72-300$  mm is available. Including a crack detected nut. When ordering implicitly indicate the required length. Not suitable for permanent swiveling under full load. Maximum WLL with the smallest thread diameter. Choose the attachment points in such a way that the introduced forces are accommodated by the work piece without being deformed. Work piece material, at least 1.0037 (St 37). For light metals, nonferrous heavy metals and grey cast iron, the thread type allocation must be done in such a way that, the WLL of the thread type fulfils the requirements of the respective work piece. Make sure the bolting surface is plain. Ensure an appropriate bore depth to facilitate an optimal sitting of the engaging surface.

VWBG-KA-28; 31,5t M72 with variable length

Artikel-Nr: 8600239

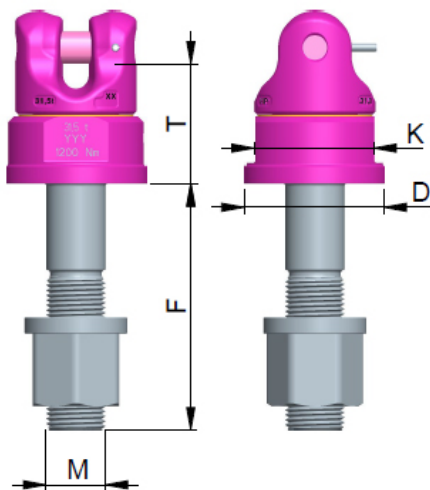

|             |           |           |
|-------------|-----------|-----------|
| Nominal WLL | 31500 kg  | 69300 lbs |
| T           | 146 mm    | 5-3/4"    |
| D           | 170 mm    | 6-11/16"  |
| F           | 72-300 mm | 72-300    |
| K           | 145 mm    | 5-11/16"  |
| M           | M72 mm    | M72       |