

PowerPoint PP-B-8t-1 1/2"-6UNC

Artikel-Nr:

8600566




- **Double ball bearing** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- **Suspension ring with enlarged pivoting area.**
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims. ● Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint PP-B-8t-1 1/2"-6UNC

Artikel-Nr: 8600566

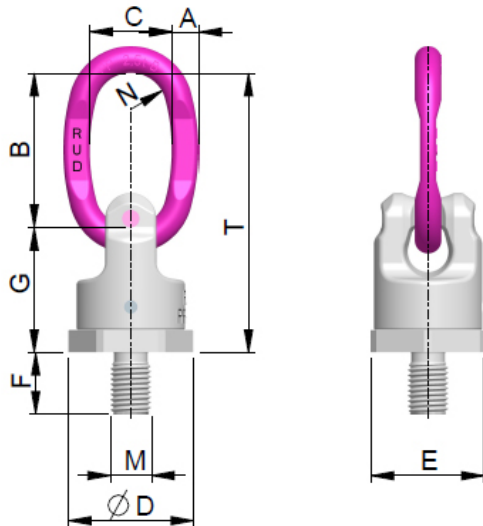

weight	6.30 kg	13.89 lbs
Nominal WLL	8000 kg	17600 lbs
T	242 mm	9-7/32"
A	24 mm	15/16"
B	140 mm	5-1/2"
C	65 mm	2-9/16"
D	100 mm	3-15/16"
E	90 mm	3-17/32"
F	54 mm	2-1/8"
G	102 mm	4"
M	1 1/2"-6UNC mm	1 1/2"-6UNC
N	28 mm	1-1/8"