

Load ring VLBG-PLUS 2t M16 with bolt

Artikel-Nr: 8504655




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **optimal WLL with captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL for all loading directions**
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2015-12
Certificate No.: OA 1651053
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 2t M16 with bolt

Artikel-Nr: 8504655

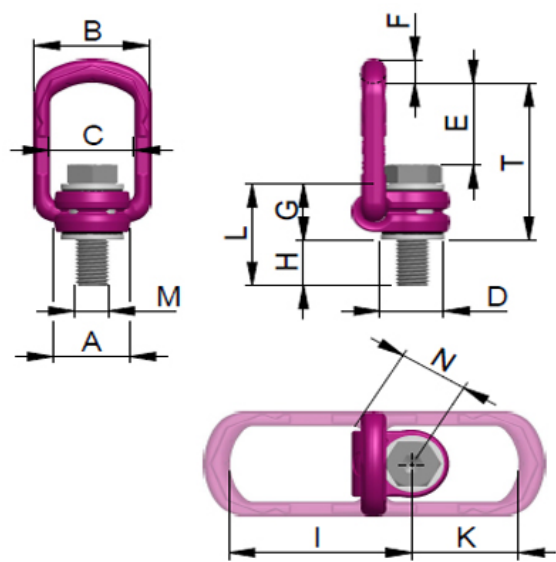

weight	0.55 kg	1.21 lbs
Nominal WLL	2000 kg	4400 lbs
T	85 mm	3-11/32"
A	33 mm	1-5/16"
B	56 mm	2-3/16"
C	36 mm	1-27/64"
D	30 mm	1-3/16"
E	39 mm	1-9/16"
F	13,5 mm	17/32"
G	36 mm	1-27/64"
H	22 mm	7/8"
I	86 mm	3-3/8"
K	47 mm	1-7/8"
L	58 mm	2-9/32"
M	M16 mm	M16
N	38 mm	1-1/2"