

Load ring VLBG-PLUS 6,7t M30 with bolt

Artikel-Nr: 8504661




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrud-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectivley flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2012-05
Certificate No.: OA 1651053
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning Actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 6,7t M30 with bolt

Artikel-Nr: 8504661

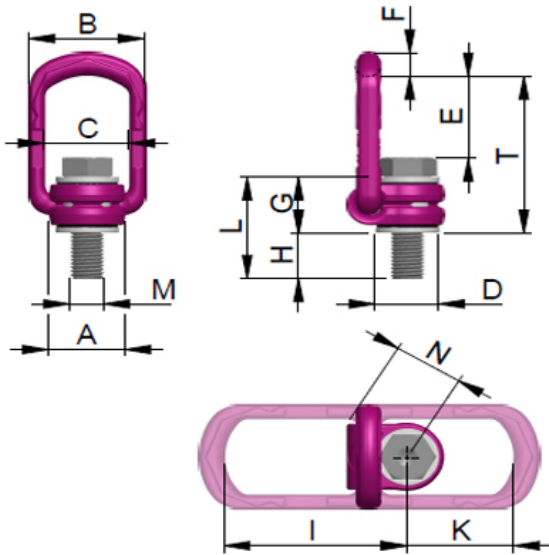

| | | |
|--------------------|---------|-----------|
| weight | 3.22 kg | 7.10 lbs |
| Nominal WLL | 6700 kg | 14740 lbs |
| T | 147 mm | 5-25/32" |
| A | 60 mm | 2-3/8" |
| B | 103 mm | 4-1/16" |
| C | 65 mm | 2-9/16" |
| D | 60 mm | 2-3/8" |
| E | 67 mm | 2-5/8" |
| F | 22,5 mm | 7/8" |
| G | 61 mm | 2-13/32" |
| H | 49 mm | 1-15/16" |
| I | 151 mm | 5-15/16" |
| K | 80 mm | 3-1/8" |
| L | 110 mm | 4-11/32" |
| M | M30 mm | M30 |
| N | 67 mm | 2-5/8" |