

Load ring VLBG-Z 1t 1/2"-13UNC with bolt

Artikel-Nr: 8502349




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 1t 1/2"-13UNC with bolt

Artikel-Nr: 8502349

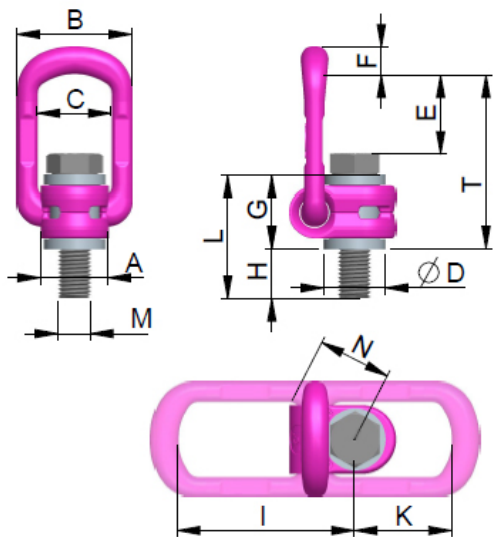

weight	0.36 kg	0.79 lbs
Nominal WLL	1000 kg	2200 lbs
T	75 mm	2-15/16"
A	32 mm	1-1/4"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	26 mm	1"
E	38 mm	1-1/2"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	22 mm	7/8"
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	50 mm	1-31/32"
M	1/2"-13UNC mm	1/2"-13UNC
N	32 mm	1-1/4"