

Load ring VLBG-Z 20t 2"-4 1/2 UNC with bolt

Artikel-Nr: 8504258




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectivley flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
 - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 20t 2"-4 1/2 UNC with bolt

Artikel-Nr: 8504258

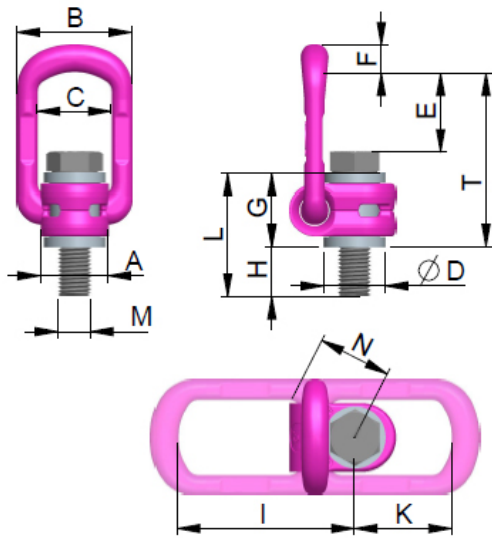

weight	11.77 kg	25.95 lbs
Nominal WLL	20000 kg	44000 lbs
T	222 mm	8-3/4"
A	95 mm	3-3/4"
B	156 mm	6-5/32"
C	100 mm	3-15/16"
D	95 mm	3-3/4"
E	105 mm	4-1/8"
F	36 mm	1-27/64"
G	87 mm	3-7/16"
H	69 mm	2-23/32"
I	230 mm	9-1/16"
K	130 mm	5-1/8"
L	156 mm	6-5/32"
M	2"-4 1/2 UNC mm	2"-4 1/2 UNC
N	100 mm	3-15/16"