

Load ring VLBG-Z 0,63t 3/8"-16UNC with variable length

Artikel-Nr:

8600440




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 10-98mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 0,63t 3/8"-16UNC with variable length

Artikel-Nr: 8600440

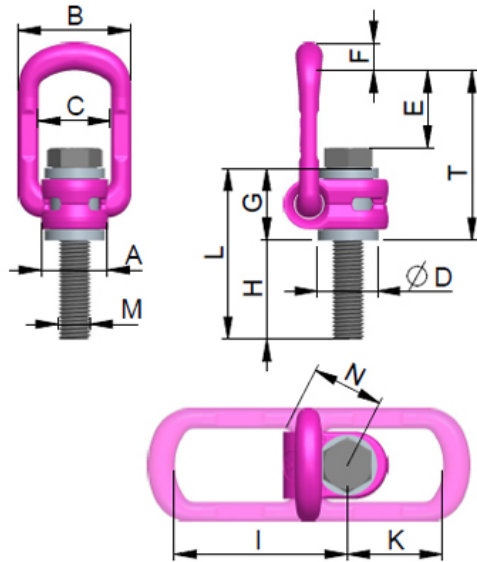

Nominal WLL	630 kg	1385 lbs
T	75 mm	2-15/16"
A	30 mm	1-3/16"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	24 mm	15/16"
E	39 mm	1-9/16"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	10-98 mm	3/8" up to 3-27/32"
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	39-127 mm	1-9/16" up to 5"
M	3/8"-16UNC mm	3/8"-16UNC
N	32 mm	1-1/4"