

Load ring VLBG-Z 1t 1/2"-13UNC with variable length

Artikel-Nr: 8600441




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 13-123mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 1t 1/2"-13UNC with variable length

Artikel-Nr: 8600441

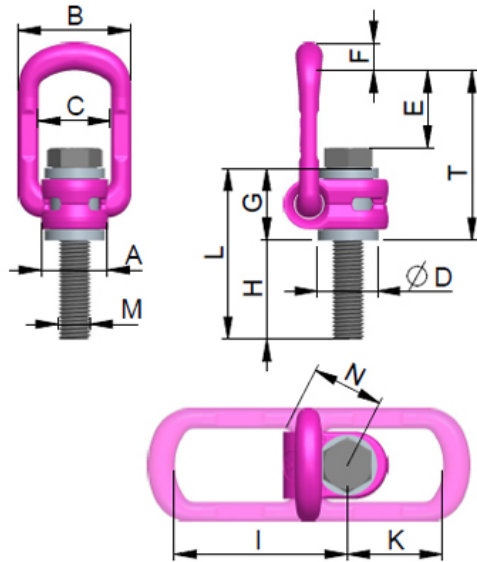

Nominal WLL	1000 kg	2200 lbs
T	75 mm	2-15/16"
A	32 mm	1-1/4"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	26 mm	1"
E	38 mm	1-1/2"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	13-123 mm	13-123
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	42-152 mm	42-152
M	1/2"-13UNC mm	1/2"-13UNC
N	32 mm	1-1/4"