

## Load ring VLBG-Z 4t 1"-8UNC with variable length

Artikel-Nr: 8600445




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 25-211mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Load ring VLBG-Z 4t 1"-8UNC with variable length

Artikel-Nr: 8600445

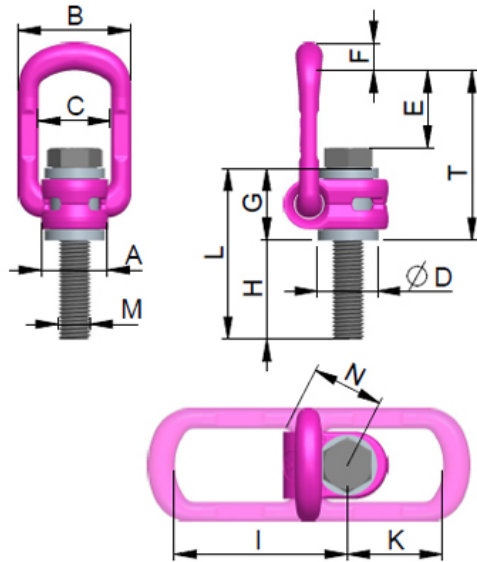

Nominal WLL	4000 kg	8800 lbs
T	125 mm	4-15/16"
A	50 mm	1-31/32"
B	82 mm	3-1/4"
C	54 mm	2-1/8"
D	45 mm	1-25/32"
E	67 mm	2-5/8"
F	18 mm	23/32"
G	43 mm	1-11/16"
H	25-211 mm	1" up to 8-5/16"
I	130 mm	5-1/8"
K	78 mm	3-1/16"
L	68-254 mm	2-11/16" up to 10"
M	1"-8UNC mm	1"-8UNC
N	48 mm	1-7/8"