

Load ring VLBG-Z 8t 1 1/2"-6UNC with variable length

Artikel-Nr: 8600447




Fully captive 100% crack detected hexagon head cap bolts with thread lengths of H= 38-270mm are available. When ordering implicitly indicate the required length.

- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Captive but exchangeable RUD-Bolt** with special corrosion protection Corrod-DT. Original RUD-Bolt is available as a spare part. Clear marking at the bolt head: RUD, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL** for all loading directions.
- Available as: - Standard Metric Thread (DIN EN 13) - Metric Fine Thread (DIN EN 13) - Coarse Pitch Thread UNC (ANSI B1.1) - Fine Thread UNF (ANSI B1.1)
- Variable bolt lengths available for tapped or through holes.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift. Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-Z 8t 1 1/2"-6UNC with variable length

Artikel-Nr: 8600447

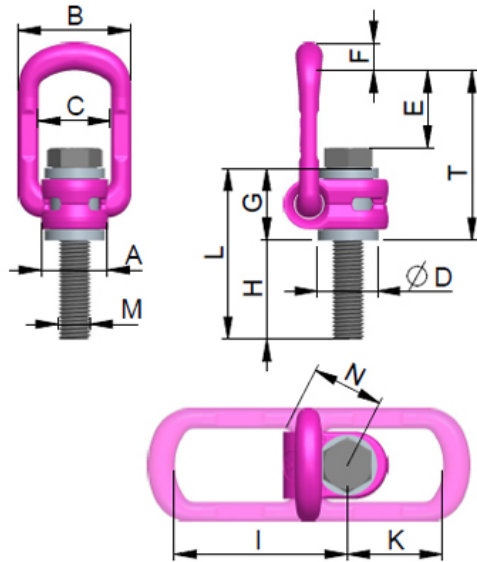

Nominal WLL	8000 kg	17600 lbs
T	197 mm	7-3/4"
A	77 mm	3"-1/32"
B	122 mm	4-13/16"
C	82 mm	3-1/4"
D	100 mm	3-15/16"
E	97 mm	3-13/16"
F	26,5 mm	1-3/64"
G	77 mm	3"-1/32"
H	38-270 mm	1-1/2" up to 10-5/8"
I	205 mm	8-1/16"
K	110 mm	4-11/32"
L	115-347 mm	4-1/2" up to 13-
M	1 1/2"-6UNC mm	1 1/2"-6UNC
N	87 mm	3-7/16"