

Vario-Starpoint VRS-F-M16 with star key

Artikel-Nr: 7101314




- Lifting points pivots 360°. Easy adjustment in load direction.
- ICE-Bolt made out of patented steel. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence.
- Not exchangeable ICE-Bolt (this reduces the usage of improper standard bolts).
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart / product information).
- Clear marking at the bolt head: RUD, thread size, batch-no, ICE.
- Variable bolt lengths available for tapped or through holes.
- Available as: – Standard Metric Thread (DIN EN 13) – Metric Fine Thread (DIN EN 13) – Coarse Pitch Thread UNC (ANSI B1.1) – Fine Thread 8UN (ANSI B1.1) – Inch Pipe Thread (DIN 228)
- Significant product characteristics of the VRS are subject to property right claims.
- Tested and certified by DGUV. Testing specifications: GS-OA-15-04:2012-05
Certificate No.: OA OA 1451015
- Complying with the US-Standard (ASME B30.26). Quick and easy installation with just one bolt connection.
- Installation and disassembly without any further tools than the nonexchangeable Easy-Fit star profile key for singular lifts.
- For permanent installation and recurrent lifts we can offer a special socket wrench to apply the requested torque (fits to a common Inch torque wrench).

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Vario-Starpoint VRS-F-M16 with star key

Artikel-Nr: 7101314

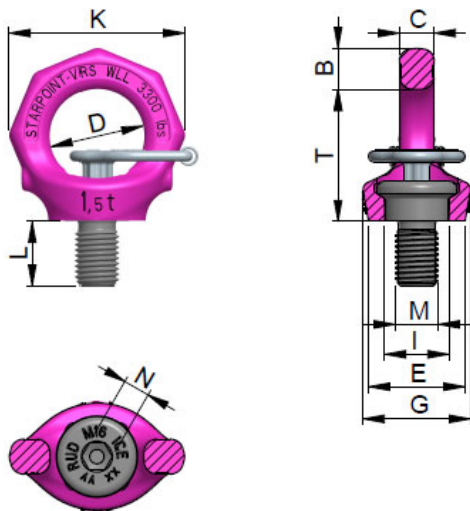

weight	0.36 kg	0.79 lbs
Nominal WLL	1500 kg	3300 lbs
T	49 mm	1-15/16"
B	15 mm	19/32"
C	13 mm	1/2"
D	35 mm	1-3/8"
E	36 mm	1-27/64"
G	40 mm	1-9/16"
I	23,5 mm	59/64"
K	65 mm	2-9/16"
L	24 mm	15/16"
M	M16 mm	M16
N	10 mm	3/8"