

Excavator hook welded VABH-W 6,7t

Artikel-Nr: 8502239




Used as a lifting point for spreader bars, wire rope slings, round slings, lifting means: oval suspension ring.

- Can be combined with most commercial lifting means without additional connecting element.
- Patented markings for easy determination for withdraw of service.
- Robust, forged safety latch.
- Phosphated surface.
- Weld-on point can be used as excavator hook.
- Simple and fast welding installation.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) Weld: Kehlnaht 6 (please observe user instruction).
- Area of application in ring plane: 150°, Area of application at lateral load: +45°, -45°

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Excavator hook welded VABH-W 6,7t

Artikel-Nr: 8502239

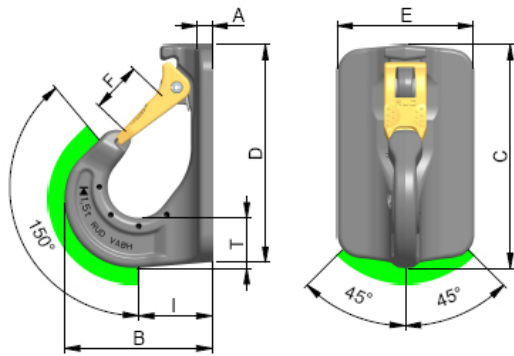

weight	5.89 kg	12.99 lbs
Nominal WLL	6700 kg	15000 lbs
T	40 mm	1-9/16"
A	13 mm	1/2"
B	156 mm	6-5/32"
C	208 mm	8-3/16"
D	200 mm	7-7/8"
E	120 mm	4-3/4"
F	40 mm	1-9/16"
I	70 mm	2-3/4"