

## ICE-Foundry Hook IWH 16


Artikel-Nr: 7904363



Often referred to as the container hook. Considerably larger mouth width than ISH but without a safety latch. Use only where unintentional unhooking is impossible. Inappropriate for overhead lifting! When using foundry hooks, special attention must be paid and a risk assessment must be carried out before using. Robust cross section (SizeC/G) is resistant against increased lateral forces. Specially designed wearing edges to protect the chain link, compare the dimension "E". Gauge marks for measuring the width of the hook opening. Connecting bolt and tensioning sleeve are pre-assembled. ICE-Foundry Hook is marked by the RUD-ID-TAG<sup>®</sup> (RFID chip) and with the clear identification number distinguished.

## ICE-Foundry Hook IWH 16

Artikel-Nr: 7904363

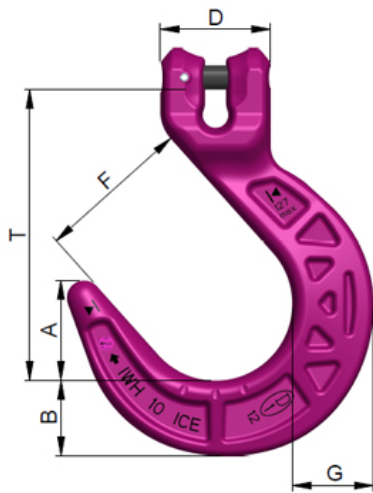

|                    |          |           |
|--------------------|----------|-----------|
| <b>weight</b>      | 6.90 kg  | 15.21 lbs |
| <b>Nominal WLL</b> | 12500 kg | 27500 lbs |
| <b>T</b>           | 208 mm   | 8-3/16"   |
| <b>A</b>           | 75 mm    | 2-15/16"  |
| <b>B</b>           | 56 mm    | 2-3/16"   |
| <b>C</b>           | 43 mm    | 1-11/16"  |
| <b>D</b>           | 90 mm    | 3-17/32"  |
| <b>E</b>           | 58 mm    | 2-9/32"   |
| <b>F</b>           | 114 mm   | 4-1/2"    |
| <b>G</b>           | 61 mm    | 2-13/32"  |