

PSA-INOX-STAR-Eyebolt M16


Artikel-Nr: 7996757



- **Lifting points pivots 360°**
- **They are corresponding to a "anchor point" according to European edict 2016/425** and the DIN 795:2012-10 resp. DIN CEN / TS 16415:2013-4 and they are marked with CE and the number of load bearing persons (=1 or 2 persons).
- These products are certified by a notified institution of DGUV (Deutsche Gesetzliche Unfallversicherung): DGUV-test certificate No.: PS17060031, PS17060032 and PS17060033 with the evidence of the in OSHA 1926.502: 2001/01 paragraph (d)(15) and DIN EN 50308:2005 chapter 4.5 for lifting points required Forces.
- Non removable special bolt (this reduces the risk of improper standard bolts).
- Available as: – Standard Metric Thread (DIN EN 13) – Coarse Pitch Thread UNC (ANSI B1.1)
- DGUV approval for attachment to steel and with blind rivet nuts.
- **Pentagonal shape for a clear determination to common lifting points (i.e. eye bolts).** Body and bolt made out of Duplex Steel 1.4462 (high resistancy in sea water and in environment with a high concentration of chlorine ions. Component is allowed to be used in outdoor applications.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PSA-INOX-STAR-Eyebolt M16

Artikel-Nr: 7996757

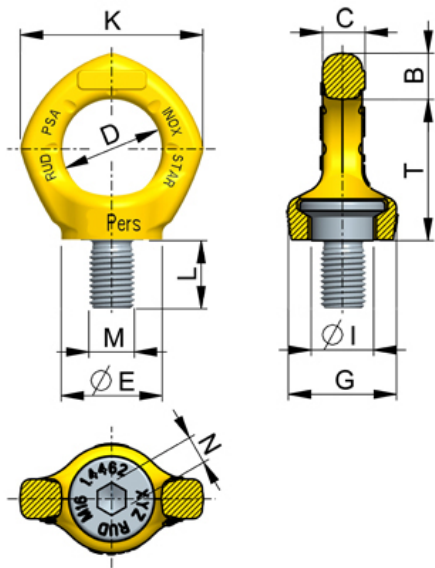

weight	0.31 kg	0.68 lbs
T	50 mm	1-31/32"
B	16 mm	5/8"
C	15 mm	19/32"
D	35 mm	1-3/8"
E	35 mm	1-3/8"
G	38 mm	1-1/2"
I	22 mm	7/8"
K	65 mm	2-9/16"
L	24 mm	15/16"
M	M16 mm	M16
N	10 mm	3/8"