

VIP-Plug-in Connector VERG-10

Artikel-Nr: 8600132



VERG, a plug-in bolt used for transportation or similar lifting purposes, when bores are the specified lifting points available.


Always indicate length L and diameter size D of the plug-in connector when ordering.

- Minimum $\varnothing D = 28 \text{ mm}$
- Maximum $\varnothing D = 48 \text{ mm}$
- Bore diameter = $D + 1 \text{ mm}$
- Minimum bolt length $L = 2 \times D$

For vertical lifting purposes, we recommend that a RUD spreader bar or cross beam be used. Attention: Attach the load as close as possible to the fork head when lifting. VIP-Plug-in connectors are non stock items. Production is subject to customer demand. Bear in mind the respective delivery periods.

VIP-Plug-in Connector VERG-10

Artikel-Nr: 8600132

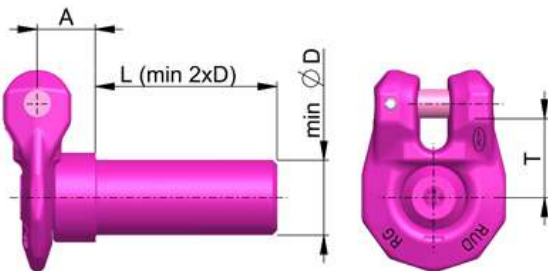

weight	0.0 kg	0.00 lbs
Nominal WLL	4000 kg	8800 lbs
T	33 mm	1-5/16"
A	18 mm	23/32"
D	28 mm	1-1/8"