

## VIP-Plug-in Connector VERG-13

Artikel-Nr: 8600133



VERG, a plug-in bolt used for transportation or similar lifting purposes, when bores are the specified lifting points available.


Always indicate length L and diameter size D of the plug-in connector when ordering.

- Minimum  $\varnothing D = 36 \text{ mm}$
- Maximum  $\varnothing D = 48 \text{ mm}$
- Bore diameter =  $D + 1 \text{ mm}$
- Minimum bolt length  $L = 2 \times D$

For vertical lifting purposes, we recommend that a RUD spreader bar or cross beam be used. Attention: Attach the load as close as possible to the fork head when lifting. VIP-Plug-in connectors are non stock items. Production is subject to customer demand. Bear in mind the respective delivery periods.

# VIP-Plug-in Connector VERG-13

Artikel-Nr: 8600133

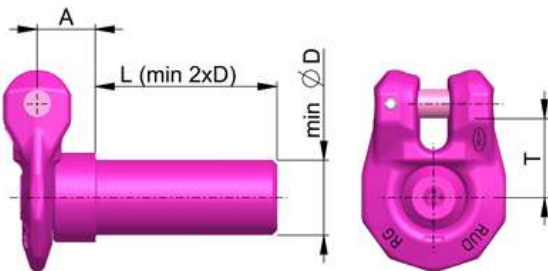

weight	0.0 kg	0.00 lbs
Nominal WLL	6700 kg	15000 lbs
T	42 mm	1-21/32"
A	24 mm	15/16"
D	36 mm	1-27/64"