

## VIP-Plug-in Connector VERG-16

Artikel-Nr: 8600134



VERG, a plug-in bolt used for transportation or similar lifting purposes, when bores are the specified lifting points available.

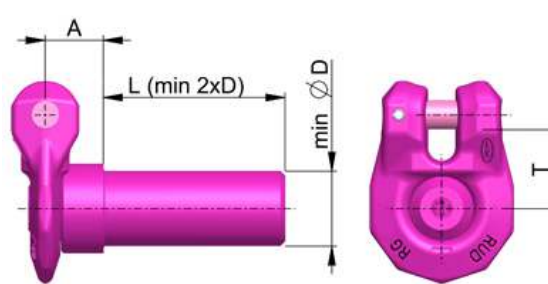
Always indicate length L and diameter size D of the plug-in connector when ordering.

- Minimum  $\varnothing D = 45 \text{ mm}$
- Maximum  $\varnothing D = 48 \text{ mm}$
- Bore diameter =  $D + 1 \text{ mm}$
- Minimum bolt length  $L = 2 \times D$

For vertical lifting purposes, we recommend that a RUD spreader bar or cross beam be used. Attention: Attach the load as close as possible to the fork head when lifting. VIP-Plug-in connectors are non stock items. Production is subject to customer demand. Bear in mind the respective delivery periods.

# VIP-Plug-in Connector VERG-16

Artikel-Nr: 8600134

|   |                    |          |           |
|---|--------------------|----------|-----------|
|  | <b>weight</b>      | 0.0 kg   | 0.00 lbs  |
|   | <b>Nominal WLL</b> | 10000 kg | 22000 lbs |
|   | <b>T</b>           | 54 mm    | 2-1/8"    |
|   | <b>A</b>           | 29 mm    | 1-5/32"   |
|   | <b>D</b>           | 45 mm    | 1-25/32"  |