

## Lashing Point weldable LRBS-FIX-13400 daN

Artikel-Nr: 7999304




- Clear marking of the minimum lashing capacity for all loading directions.  
Lashing Capacity marking in daN.
- Suspension ring pivots 180°.
- Split force introduction due to multiple point fixing.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions).
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible.
- Patented markings for easy determination for withdraw of service.
- Easy painting due to fixing of the suspension ring.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks.
- The weld-on-block is made (forged) out of a good weldable steel.
- Phosphated surface.
- Significant product characteristics of the LRBS-FIX and LRBK-FIX are subject to property right claims.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Lashing Point weldable LRBS-FIX-13400 daN

Artikel-Nr: 7999304

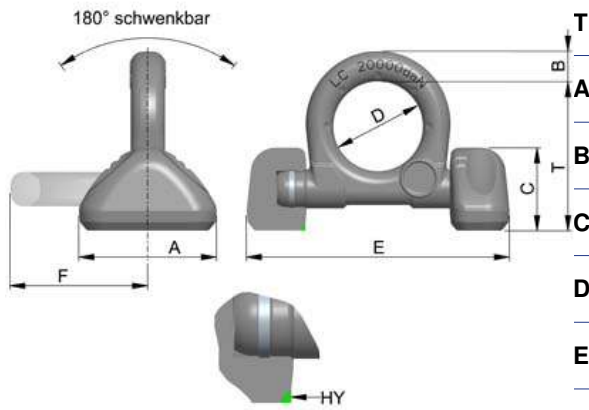

|                         |           |          |
|-------------------------|-----------|----------|
| <b>weight</b>           | 2.24 kg   | 4.94 lbs |
| <b>T</b>                | 97 mm     | 3-13/16" |
| <b>A</b>                | 88 mm     | 3-15/32" |
| <b>B</b>                | 20 mm     | 3/4"     |
| <b>C</b>                | 50 mm     | 1-31/32" |
| <b>D</b>                | 60 mm     | 2-3/8"   |
| <b>E</b>                | 167 mm    | 6-19/32" |
| <b>F</b>                | 91 mm     | 3-9/16"  |
| <b>Lashing capacity</b> | 13400 daN | null     |