

## Lashing Point weldable LRBS-FIX-32000 daN

Artikel-Nr: 7999306




- Clear marking of the minimum lashing capacity for all loading directions.  
Lashing Capacity marking in daN.
- Suspension ring pivots 180°.
- Split force introduction due to multiple point fixing.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions).
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible.
- Patented markings for easy determination for withdraw of service.
- Easy painting due to fixing of the suspension ring.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks.
- The weld-on-block is made (forged) out of a good weldable steel.
- Phosphated surface.
- Significant product characteristics of the LRBS-FIX and LRBK-FIX are subject to property right claims.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## Lashing Point weldable LRBS-FIX-32000 daN

Artikel-Nr: 7999306

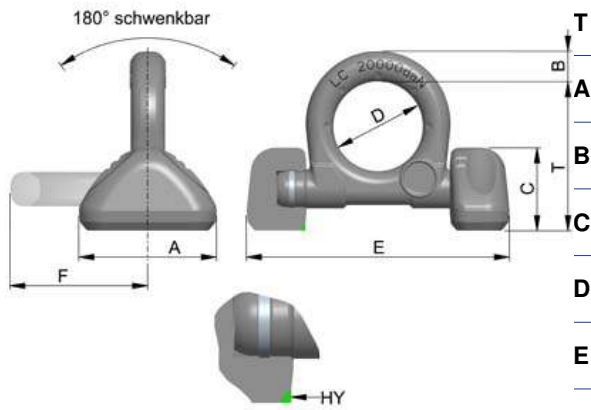

<b>weight</b>	8.23 kg	18.14 lbs
<b>T</b>	140 mm	5-1/2"
<b>A</b>	130 mm	5-1/8"
<b>B</b>	30 mm	1-3/16"
<b>C</b>	72 mm	2-27/32"
<b>D</b>	90 mm	3-17/32"
<b>E</b>	267 mm	10-1/2"
<b>F</b>	134 mm	5-9/32"
<b>Lashing capacity</b>	32000 daN	null