

Special WBPG M48 for 250t WLL / 730 mm

Artikel-Nr: 7905690




- With 12 pcs RUD-bolts M48
- **Heavy Duty Generation** WBPG up to 250 t WLL.
- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **Detachable suspension ring in the shape of a shackle, for the attachment of common lifting means.**
- RUD bolts with special corrosion protection Corrud-DT are included in delivery and are also available as a spare part. Clear marking at the bolt head: RUD, thread size, batch-no., class of strength.
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Special WBPG M48 for 250t WLL / 730 mm

Artikel-Nr: 7905690

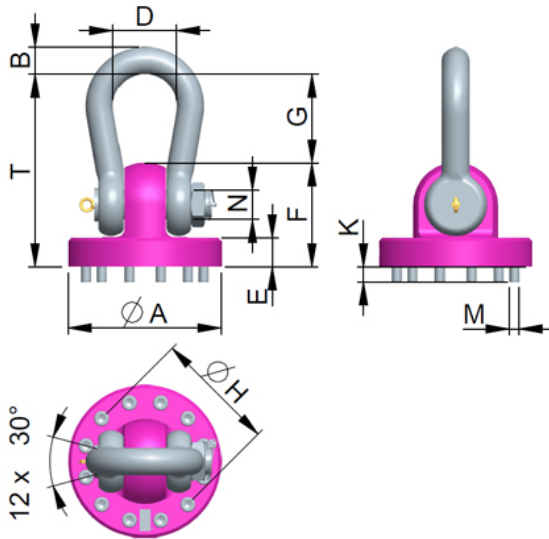

weight	992.00 kg	2186.99 lbs
Nominal WLL	250000 kg	550000 lbs
T	920 mm	36-7/32"
A	730 mm	28-3/4"
B	130 mm	5-1/8"
D	305 mm	12"
E	138 mm	5-7/16"
F	496 mm	19-1/2"
G	424 mm	16-11/16"
H	580 mm	22-27/32"
K	72 mm	2-27/32"
M	M48 mm	M48
N	140 mm	5-1/2"