

## PowerPoint PP-B-0,63t-M12

Artikel-Nr: 7989522




- **Double ball bearing** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- **Suspension ring with enlarged pivoting area.**
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451017
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims. ● Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

# PowerPoint PP-B-0,63t-M12

Artikel-Nr: 7989522

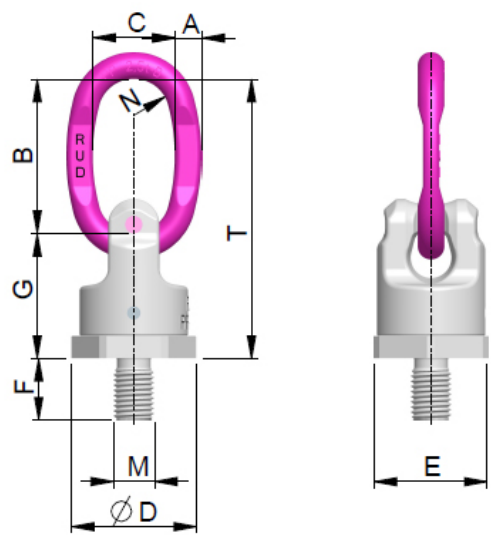

weight	0.35 kg	0.77 lbs
Nominal WLL	630 kg	1385 lbs
T	106 mm	4-3/16"
A	9 mm	11/32"
B	65 mm	2-9/16"
C	35 mm	1-3/8"
D	40 mm	1-9/16"
E	36 mm	1-27/64"
F	18 mm	23/32"
G	41 mm	1-5/8"
M	M12 mm	M12
N	15 mm	19/32"