

## PowerPoint PP-S-1,5t-5/8"-11UNC

Artikel-Nr:

8600582




**Can be combined with most commercial lifting means without additional connecting element.**

- **Double ball bearing** is the optimal solution for turning and flipping operations under full load (not suitable for permanent turning under load).
- **Lifting points pivots 360°.**
- **Large distance between bolt-on surface and load to avoid damage.**
- **Rotatable at nominal WLL, 90° to the bolt-on direction** Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1 (MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims.
- The shape of the hook tip avoids unintentional attachment into small holes and tip loading. Robust, forged safety latch.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

PowerPoint PP-S-1,5t-5/8"-11UNC

Artikel-Nr: 8600582

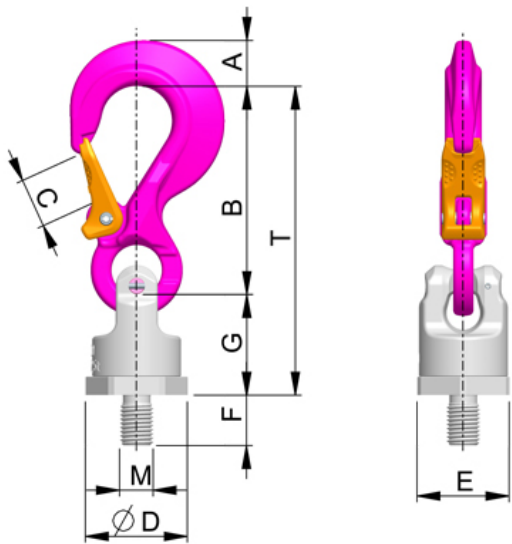

weight	0.9 kg	2.0 lbs
Nominal WLL	1500 kg	3300 lbs
T	147.0 mm	5-25/32"
A	20.0 mm	25/32"
B	97.0 mm	3-13/16"
C	25 mm	1"
D	46 mm	1-13/16"
E	41 mm	1-5/8"
F	25 mm	1"
G	50 mm	1-31/32"
M	5/8"-11UNC mm	5/8"-11UNC