

So-PowerPoint PP-VIP8-2t-3/4"-10UNC with variable length

Artikel-Nr:

8600322




From the factory, bolt lengths from $F = 56-222$ mm (with through thread) and $F = 56-222$ mm (with an approximately 29 mm shank without threads) can be supplied. When ordering implicitly indicate the required length. WLL is equivalent to that of VWBG-V, since a corresponding lower part is used. Connection only with RUD approved components e.g; VCÖH-8, oval link, PP 2tkg or the 8 mm VIP chain. Hint : The VIP chain connection is fool proof. When assembling the components, pay attention to the correct WLL allocation.

- Can be combined with most commercial lifting means without additional connecting element.
- Lifting points pivots 360° .
- Large distance between bolt-on surface and load to avoid damage.
- Rotatable at nominal WLL, 90° to the bolt-on direction. Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Marking with requested torque moment and nominal WLL with a safety factor of 4:1(MRL 2006/42/EG) and 5:1 (ASME B 30.26).
- Component according to the test criterias of BG/DGUV "GS-OA-15-04".
- Significant product characteristics of the PP-S, PP-B and PP-VIP are subject to property right claims.
- The shape of the hook tip avoids unintentional attachment into small holes and tip loading. Robust, forged safety latch.
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

So-PowerPoint PP-VIP8-2t-3/4"-10UNC with variable length

Artikel-Nr: 8600322

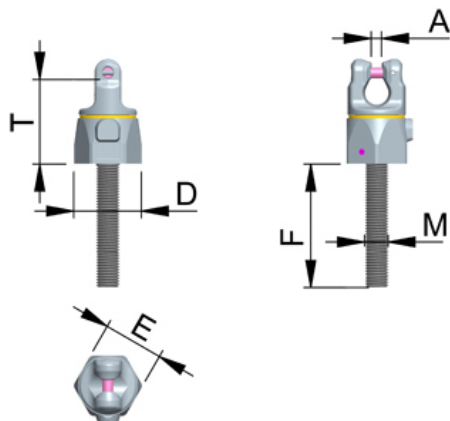

Nominal WLL	2000 kg	4400 lbs
T	73 mm	2-7/8"
A	8 mm	5/16"
D	61 mm	2-13/32"
E	55 mm	2-5/32"
F	56-222 mm	2-3/16"" up to 8-
M	3/4"-10UNC mm	3/4"-10UNC