

Lifting Point-Vario VWBG-V 0,45t-M10

Artikel-Nr: 7103715




- Ball bearing for a shock-free rotating and turning with less friction.
- Lifting points pivots 360°.
- Suspension ring with enlarged pivoting area.
- Comprehensive range of threads and WLL (M8 – M30 bzw. 0,3 t – 5 t).
- Available as:
 - Standard Metric Thread (DIN EN 13)
 - Metric Fine Thread (DIN EN 13)
 - Coarse Pitch Thread UNC (ANSI B1.1)
- Clear marking of the minimum WLL for all loading directions. Higher WLL possible when location and installation is optimised(compare WLL chart / product information).
- Patented markings for easy determination for withdraw of service as well as the determination of the load angle.
- Rotatable at nominal WLL, 90° to the bolt-on direction.
- Variable bolt lengths available for tapped or through holes.
- Large distance between bolt-on surface and load to avoid damage.
- Non removable special bolt (this reduces the risk of improper standard bolts).
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2015-12 Certificate No.: OA 1651056
- Quick and easy installation with just one bolt connection.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Lifting Point-Vario VWBG-V 0,45t-M10

Artikel-Nr: 7103715

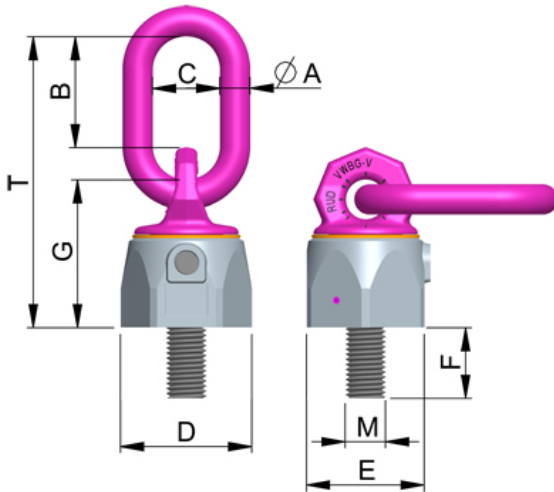

weight	0.29 kg	0.64 lbs
Nominal WLL	450 kg	990 lbs
T	78 mm	3-1/16"
A	8 mm	5/16"
B	31 mm	1-7/32"
C	29 mm	1-5/32"
D	33,5 mm	1-27/64"
E	30 mm	1-3/16"
F	17 mm	43/64"
G	38 mm	1-1/2"
M	M10 mm	M10