

## Lifting Point threaded VWBG 8t(10t)-M36


Artikel-Nr: 7999059



With increased WLL in axial direction and when load ring is aligned. For all loads, which have to be flipped and turned-over. Loadable in any direction: Safety factor 4. Can be turned under load. Cannot be turned continuously in 90° direction at full load. Can also be supplied with longer thread lengths. Simple assembly, just a tapped hole is required. High tensile, tested lifting lug acc. to EN1677-4. Surface: Pink powder coated. The bolting position has to be designed in such a way that the introduced forces are accommodated by the work piece without being deformed. Pay attention to a plane surface. Blind holes have to be drilled deep enough to make sure that bolt-on flange has a proper support. Minimum steel quality 1.0037 ( ST37 ) When using light metals, non ferrous heavy metals and grey cast iron, the thread classification must be chosen in such a way that the WLL of the thread is according to the strength of the base material. Due to the ball bearings, for a normal single lift, tightening with a wrench without an extension acc. to DIN 895 respectively DIN 894 is sufficient. The VWBG must have full support on the bolt-on surface ( D ) without using a shim ring. If the VWBG stays permanent at the load, tensioning with a torque of 410 Nm is required. In case of shock loading, twisting or vibrating, especially with through hole bolt connections using nuts, an unintentional dismounting may occur. Securing possibilities: A liquid locking glue, f.e. Loctite ( Read instructions of manufacturer ) or a mechanical form locking bolt device f.e. a crown nut with a cotter should be used.

# Lifting Point threaded VWBG 8t(10t)-M36

Artikel-Nr: 7999059

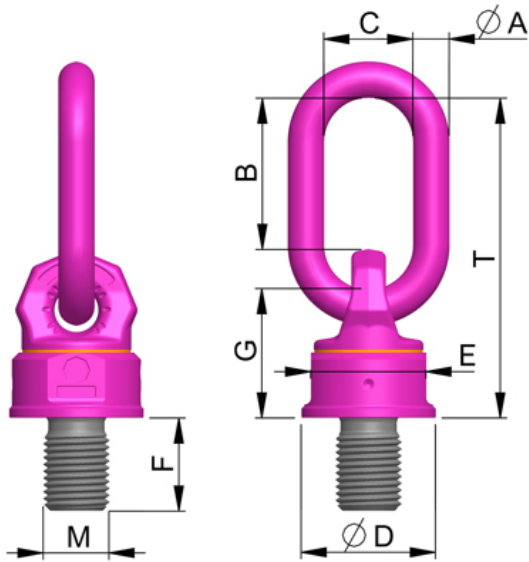

weight	4.72 kg	10.41 lbs
Nominal WLL	8000 kg	17600 lbs
T	208 mm	8-3/16"
A	22 mm	7/8"
B	86 mm	3-3/8"
C	50 mm	1-31/32"
D	90 mm	3-17/32"
E	80 mm	3-1/8"
F	54 mm	2-1/8"
G	94 mm	3-11/16"
M	M36 mm	M36