

Load ring VLBG-PLUS 0,63t M8 with bolt

Artikel-Nr: 8504651




- **Lifting points pivots 360°. Suspension ring pivots 180°**
- **optimal WLL with captive but exchangeable ICE-Bolt** made out of patented steel with special corrosion protection Corrud-DT. Non-hazardous deep temperature usage down to -60°; higher toughness and therefore higher bending strength as well as less wear occurrence. Original ICE-Bolt is available as a spare part. Clear marking at the bolt head: RUD, ICE, thread size, batchno., class of strength.
- **Clamping spring** works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lifting mean possible respectively flat design if turned down.
- **Clear marking of the minimum WLL for all loading directions**
- Available as:
 - Standard Metric Thread (DIN EN 13)
- Variable bolt lengths available for tapped or through holes.
- Tested and certified by DGUV Testing specifications: GS-OA-15-04:2015-12
Certificate No.: OA 1651053
- Quick and easy installation with just one bolt connection.
- Assembly with flat / ring wrench or allen key possible.
- Hand tightening with appropriate wrench is sufficient for a singular lift.
- Please observe torque instructions when lifting point is permanently installed resp. at constant swivelling operations and tilting/ turning actions.

Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load ring VLBG-PLUS 0,63t M8 with bolt

Artikel-Nr: 8504651

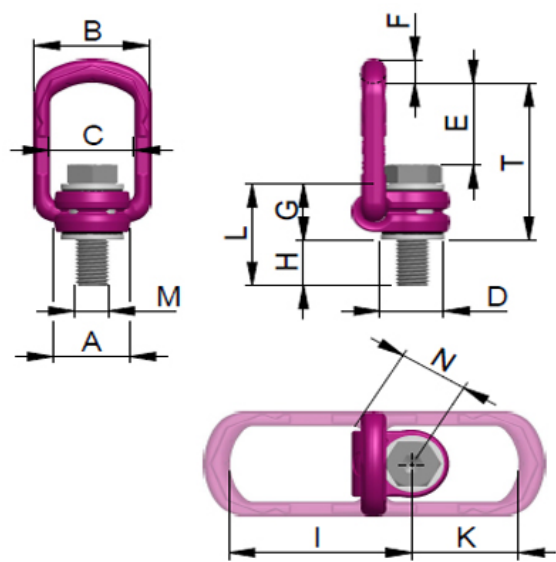

weight	0.30 kg	0.66 lbs
Nominal WLL	630 kg	1385 lbs
T	75 mm	2-15/16"
A	30 mm	1-3/16"
B	54 mm	2-1/8"
C	34 mm	1-11/32"
D	24 mm	15/16"
E	40 mm	1-9/16"
F	10 mm	3/8"
G	29 mm	1-5/32"
H	11 mm	7/16"
I	75 mm	2-15/16"
K	45 mm	1-25/32"
L	40 mm	1-9/16"
M	M8 mm	M8
N	32 mm	1-1/4"