

## PowerPoint WPPH-B-2,5t

Artikel-Nr: 7989978




- Large distance between bolt-on surface and load to avoid damage.
- Suspension ring with enlarged pivoting area.
- Ideal connection link for crossbar construction.
- Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions). The circular weld seam HY 3 + 5 requires only a small welding volume.
- Compact design and high wear resistancy due to the usage of high tensile material.
- Material of weld-on-block 1.6541 (23MnNiCrMo52) (please observe user instruction).
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Significant product characteristics of the WPP-S, WPP-B, WPP-VIP, WPPH-S, WPPH-B and WPPH-VIP are subject to property right claims.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451022.
- Simple and fast welding installation.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## PowerPoint WPPH-B-2,5t

Artikel-Nr: 7989978

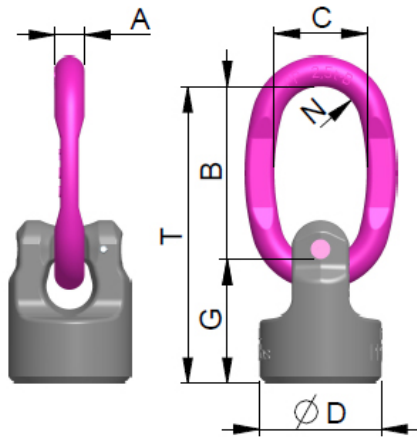

<b>weight</b>	0.90 kg	1.98 lbs
<b>Nominal WLL</b>	2500 kg	5500 lbs
<b>T</b>	127 mm	5"
<b>A</b>	13 mm	1/2"
<b>B</b>	74 mm	2-29/32"
<b>C</b>	40 mm	1-9/16"
<b>D</b>	53 mm	2-3/32"
<b>G</b>	53 mm	2-3/32"
<b>N</b>	18 mm	23/32"