

## PowerPoint WPPH-VIP8-2,5t

Artikel-Nr: 7989984




- Large distance between bolt-on surface and load to avoid damage.
- Ideal connection link for crossbar construction.
- Universal and non-mix-up clevis connection for easy construction with chains, hooks and eye.
- Lowest kinking possibility due to cardan joint.
- Clear marking of the minimum WLL for all loading directions.
- Requirements of the DIN 18800 are fulfilled by the weld arrangement (circular fillet weld), this means non occurrence of contact/crevice corrosion due to the endless weld seam (therefore suitable for outdoor constructions). The circular weld seam HY 3 + 5 requires only a small welding volume.
- Compact design and high wear resistancy due to the usage of high tensile material. ●Material of weld-on-block 1.6541 (23MnNiCrMo52) (please observe user instruction).
- The WLL statement corresponds to the minimum WLL in all loading directions. Higher WLL possible when location and installation is optimised (compare WLL chart).
- Significant product characteristics of the WPP-S, WPP-B, WPP-VIP, WPPH-S, WPPH-B and WPPH-VIP are subject to property right claims.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451022.
- Simple and fast welding installation.

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

## PowerPoint WPPH-VIP8-2,5t

Artikel-Nr: 7989984

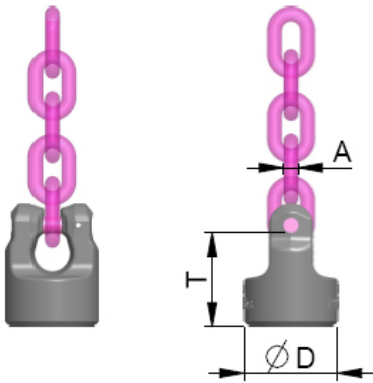

<b>weight</b>	0.74 kg	1.63 lbs
<b>Nominal WLL</b>	2500 kg	5500 lbs
<b>T</b>	53 mm	2-3/32"
<b>A</b>	8 mm	5/16"
<b>D</b>	53 mm	2-3/32"