


Load Ring VLBS-U-10t with spring

Artikel-Nr: 7993040




Universal Lifting point for welding with a diverse operating range in engineering and plant manufacturing.

- Suspension ring with optimised function form for a better support at side loading and protection of the clamping spring.
- Suspension ring pivots 180°.
- 100 % WLL at 90° in the load ring plane possible.
- Clamping spring works as a noise reduction and holds the suspension ring in the requested position; therefore simple hinge of lashing mean possible.
- Distance knobs at the weld-on block to achieve the necessary distance for the root weld.
- Clear marking of the minimum WLL for all loading directions.
- Simple and process safe positioning for the welding of pre-assembled components consisting of suspension ring and weld-on blocks. Weld: HV 16 + a 4
- The weld-on-block is made (forged) out of a good weldable steel.
- Tested and certified by DGUV, Testing specifications: GS-OA-15-04:2012-05, Certificate-No.: OA 1451021
- Significant product characteristics of the VLBS are subject to property right claims.
- Confirmation of the deep temperature ability to -40°C by the notch bar impact test is on request possible (before order is placed).

Welding should only be carried out by qualified persons according to ISO 9606-1. Other important RUD specific information and specialities to our RUD lifting points can be found in the specific user instruction.

Load Ring VLBS-U-10t with spring

Artikel-Nr: 7993040

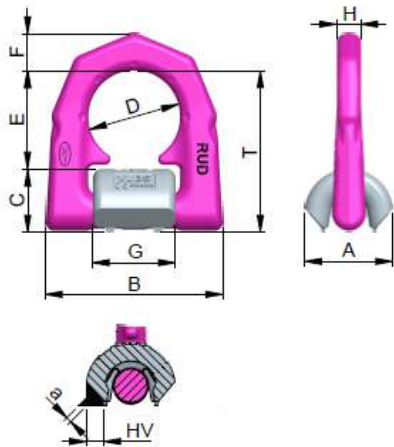

weight	2.76 kg	6.08 lbs
Nominal WLL	10000 kg	22000 lbs
T	126 mm	5"
A	75 mm	2-15/16"
B	129 mm	5-1/16"
C	55 mm	2-5/32"
D	67 mm	2-5/8"
E	71 mm	2-13/16"
F	26,5 mm	1-3/64"
G	60 mm	2-3/8"
H	26,5 mm	1-3/64"